

# ABANAKI

## Q-VAC™ 100

### Complete with Hose and Accessories

2 piece chrome metal handle kit for floor nozzle

Crevice tool for complete coolant sump drainage

Venturi pump in solid aluminum with silencer

90° drum connection w/quick connect hose fitting

6.5' ultra flexible suction hose

Floor attachment with rubber glides



Connect compressed air and go. When drum is full, it can be sent for incineration, storage or recycling.

### Wet Vacuum Swiftly Cleans Up Industrial Spills AND Removes Coolant from Sumps!

The hard-working Q-VAC™ 100 wet vacuum thoroughly suctions all types of wet industrial spills to maintain safety and removes coolant from machine sumps for optimal equipment operation. It gets the job done quickly, quietly, and virtually maintenance-free, running on compressed air.

### Mounts to Your Standard Drum

Easy-to-use and highly reliable, the Q-VAC 100 pumps liquid directly into a standard closed-top drum for convenient storage or recycling. A liquid overflow shutoff valve ensures vacuum automatically turns off when the drum is full.

### Ideal for Multiple Applications

- Complete kits available
- Vacuum oil, coolant, and other floor spills
- Empty coolants from sumps
- Remove surface decontaminates from process baths
- Empty tanks and drain pits
- Vacuum containers and vats absolutely dry

### More Q-VAC 100 Advantages:

- Minimizes use of absorption materials
- Fits on a standard 55 gal., closed top drum
- Requires no filters
- No moving parts to break or replace
- 30 day money back guarantee



**ABANAKI**  
CORPORATION  
OIL SKIMMER DIVISION

17387 Munn Road • Chagrin Falls, Ohio 44023

Ph: (440) 543-7400 • FAX: (440) 543-7404

800-358-SKIM (7546)

<http://www.abanaki.com>

# Q-VAC™ 100

## Optional Equipment

**Explosion Proof Vacuum Kit**  
Part No. QVAC100-X

**Open Top Drum Kit**  
Part No. QVAC100-OT


**Drum Dolly**  
Part No. QV1DD

**Drum Girdle**  
Part No. QV1GRDL  
(For extra protection against drum collapse)

**Q-VAC 100 Deluxe – Includes 55 gal. drum, drain valve, drum dolly, girdle, and Q-VAC 100**  
Part No. QVAC100DLX

## Q-VAC 100 Technical Specifications

Air flow @ 87 psi .....	35 cfm
Compressor PSI (minimum/optimum) .....	30/87 psi
Sound level .....	82 dB(A)
Capacity (liquid) .....	24 GPM
Optimum Compressor .....	10 HP

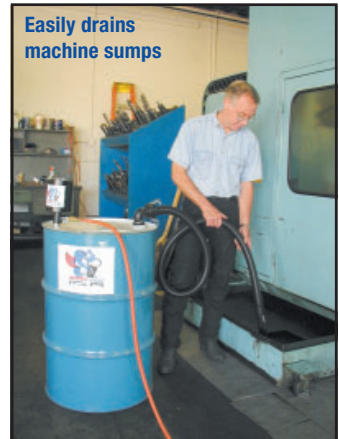

## Other Oil Skimming Products From Abanaki:

**OIL GRABBER® MODEL 4**

**OIL GRABBER® MODEL 8<sup>2</sup>**

**TOTE-IT® PORTABLE**

**MIGHTY MINI®**

**1**      **2**      **3**      **4**

Optional Equipment Shown in Some Views

- OIL GRABBER MODEL 4 For Mid Volume**  
Single 4-inch wide belt (10 cm)  
Any length belt  
Capacity: 20 GPH (75 LPH)
- OIL GRABBER MODEL 8<sup>2</sup> For Most Applications**  
Single 8-inch wide belt (20.3 cm)  
Any length belt  
Capacity: 40 GPH (151.4 LPH)
- TOTE-IT PORTABLE For Moderate Capacity Applications**  
Single belt: 2-inch or 4-inch (5.1 or 10.2 cm)  
Belt length: 1' - 6" to 5' - 0" (45.2 to 152.4 cm)  
Capacity: 6 GPH - 2" belt (15.1 LPH - 5.1 cm belt)  
12 GPH - 4" belt (22.7 LPH - 10.2 cm belt)
- MIGHTY MINI For Small Applications (Parts Washers, CNC Machines, 55 Gal. Drums)**  
Single belt: 1-inch or 2-inch (25.4 or 50.8 mm)  
Belt length: 6", 12", 18", 24" (153, 305, 458, 610 mm)  
Capacity: 1 GPH - 1" belt (3.81 LPH)  
2 GPH - 2" belt (5.71 LPH)

direct separation solutions

24 Thirty Sixth Street \* Toronto, ON \* M8W3K9

647-343-6595

www.directseparation.ca



**ABANAKI CORPORATION**  
OIL SKIMMER DIVISION

17387 Munn Road • Chagrin Falls, Ohio 44023  
Ph: (440) 543-7400 • FAX: (440) 543-7404

**800-358-SKIM (7546)**

<http://www.abanaki.com>